

Frame:Plastic(UL:94V-0)  
 Impeller:Plastic(UL:94V-0)  
 Lead wire:UL1571AWG30


Specifications(Nominal)

\*Noise is measured at the distance of one (1) meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	*Noise Level (dB/A)	Weight (g)
15x15x06	AD1505LX-K90(X)	●	5	0.035	0.175	9000	0.002	0.100	0.018	0.508	10.0	1.4
	AD1505MX-K90(X)	●	5	0.040	0.200	12000	0.004	0.160	0.030	0.762	12.0	
	AD1505HX-K90(X)	●	5	0.038	0.190	15000	0.005	0.200	0.065	1.727	24.3	

Specifications subject to change without notice.

销售部经理：李祥

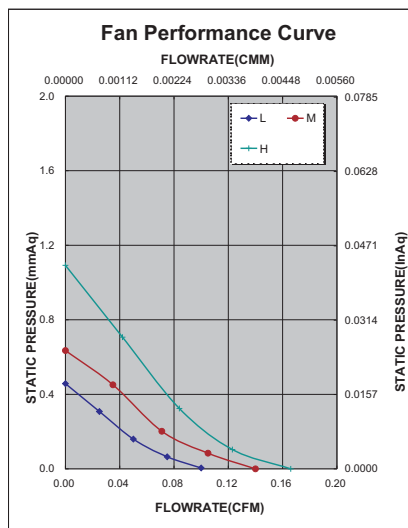

Tel: +86 755 27218281/27389376

Fax: +86 755 23221822

Cell phone : +86 13825278903

短号 : 668903

Q Q : 2240669825

(for internal)

skype: lixiang668903

E-mail: szaddalx@163.com

\*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓										

\*Safety approvals

				✓